

Up to **7.4kW Easy Charger EC-07-B**

Universal Charging Socket




IEC 61851

- ⚡ Small
- ⚡ Simple
- ⚡ Safe
- ⚡ Affordable



Product Features:

- + Compatible with all plug-in Vehicles
- + Wall box type, easy to install and maintenance
- + Power rating is adjustable from 6A to 32A via Wi-Fi or DIP switch.
- + Annular LED charging status indicator
- + Built-in Type B RCD(6mA DC+ 30mA AC)
- + Higher weather durability: -25°C~50°C
- + PC+ASA material with better performance in antflaming (UL94 V-0) and UV stabilization than ABS
- + IP54 waterproof and IK08 implact resistance
- + Compatible with power cable of 6mm²/32A & 8mm²/64A

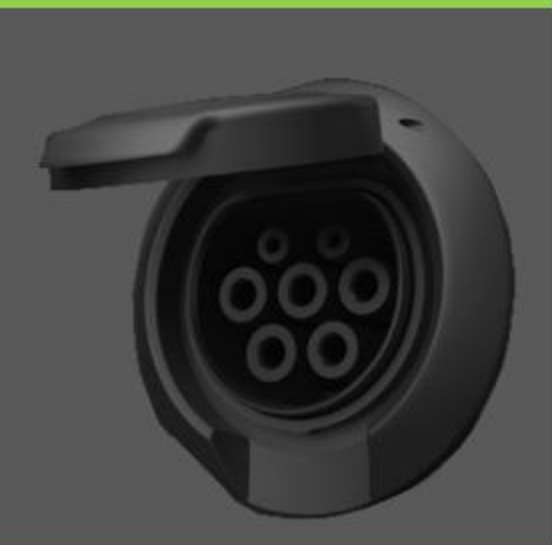

Socket Outlet With locking solenoid



Only half of A4 Paper



Current is adjustable via DIP Switch at 10 Gears



Easy to Install

PARAMETERS

Electrical Specifications

| | |
|----------------------|--------------|
| Rated Power | 7.4kW (1-ph) |
| Rated Supply Voltage | AC230 ±20% |
| Supply Frequency | 50Hz/60Hz |
| Rated Current | 32A |
| Charging type | Socketed |

Safety and certification

| | |
|------------------------|--|
| Ground fault detection | Type B RCD |
| Operating temperature | -25°C~50°C |
| Operating humidity | Max. 95% non-condensing |
| Protection Degree | IP54, IK08 |
| CE certified | Yes |
| Compliance | IEC 61851-1, IEC 61851-22, IEC 62196-2 |

Installation

| | |
|-----------------------------|-----------------------------------|
| Maximum installation height | +2000 m (6560 ft) above sea level |
|-----------------------------|-----------------------------------|

Mechanical Specifications

| | |
|----------------------|------------------------------|
| Housing | PC+ASA Anti-flaming UL94 V-0 |
| Cooling | Natural |
| Enclosure Dimensions | 210mmx160mmx126mm |
| Weight | 2.3kg |
| Mounting | Wall-mounted |

